

OR-I9I2TX Plus

Industrial High Speed Dye Sublimation Printer

(Equipped with negative pressure ink supply system and mute linear motor system)



ORIC serisi Dijital baskı makineleri, işletmenizin ihtiyacı olan en yüksek teknolojiyi kullanır. Hem Süblimasyon hemde doğrudan tekstile baskı yapabilen yüksek kaliteli, güvenilir ve hassas yapısı ile işletmenizi rakiplerinden ayıracak kalitede baskıları garanti eder. Yüksek renk performansı ve mükemmel detaylı baskısını, alışılmamış baskı hızı ile birleştirir. Kalitenizi yarına güvenle taşır.

- Daha dayanıklı ve kararlı bir baskı için; Orijinal Epson i3200 yazıcı kafası,
- Daha düzgün kağıt besleme için; keçe silindir.
- Daha yüksek verimlilik ve yüksek performans için; 12 adet kafa yapılandırması,
- Daha doğru baskı sonucunun garantisi ve profesyonel Renk yönetimi için; Orijinal Ergosoft Texprint RIP yazılımı,
- Daha istikrarlı uzun vadeli kullanım ömrü için; Son teknoloji Endüstriyel Makine Tasarım konsepti, Güçlü gövde
- Tamamen kapalı kurutma sistemi ve sessiz fanlar sayesinde gürültüsüz performans
- Daha düşük üretim maliyeti için; Jumbo Bobin besleme sistemi



Technical Specifications

Model		OR-1912TX Plus
Print Head		Twelve I3200-A1 Print Heads
Droplet Size		3.5pl
Printing Width		74.8 in.(1900 mm)
Printing Speed		1pass(720x600dpi): 5704 sqft (530 sqm/h) 2pass(720x1200dpi): 3207 sqft (298 sqm/h)
Ink Cartridges	Type	Dye Sublimation Ink
	Supply	Negative pressure ink supply system
	Color	CMYK / CMYKLCMLKLLK
Print Media		Heat Transfer Paper
Print media control		Air expansion shaft Take-up System
Dryer		External Automatic Air Heat Integrated Dryer
Moisturizing unit		Automatic Cleaning and Moisturizing Integrated Captop
RIP Software		RIIN Beidou Textile Version,Maintop6.0□photoprint□ONYX□NeoStampa□PrintFactory etc.
File Format Supported		JPG / TIFF / PDF, etc
Computer Configuration	Operating System	win7 64 bit / win10 64 bit
	Hardware Requirements	CPU: i7 Processor (9th generation or higher) Hard Disk 500g+ (solid state disk) Operating Memory 16g, Graphics Card: ATI display 4G memory, Motherboard: ASUS, Gigabyte
	Data transmission	USB3.0
Power requirement	Input Voltage	AC 220 V ± 5%, 16A, 50 HZ± 1
	Printer	2500W
	Drying unit power	Maximum 8kw
Dimensions(with stand)		142(W)x64(D)x68(H) in. (3595(W)x1633(D)x1732(H) mm
Package Dimensions		137.7(W)x29.5(D)x84.6(H) in. 3500(W)x750(D)x2150(H) mm
Working Environment		Temperature 15-32 degrees C, Humidity: relative humidity: 40-70 (non condensing)
Standard Components		External Automatic Air Heat Integrated Dryer, Low Ink Alarm System, Air Shaft Media Loading and Take-up, and Automatic Moisturizing and Cleaning Init




Negative pressure ink supply system: good for long time printing and cleaning



Mute Linear Motor System,no belt,no pvc encoder strip; Increase the Carriage moving precision and Span life;



Magnetic grid ,the Carriage drop point more precision



Pendulum rod tension structure




2 external infrared drying units,Precise control of drying temperature, reduce energy consumption



Air expansion shaft rubber strip rolls collection and release, to ensure that the collection of material more stable and flush

Sublimation Ink

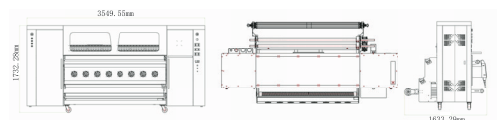

* 1.1m 12"13200 Print Heads Speed	
720x600dpi • 1pass	530 m/h
720x1200dpi • 2pass	298 m/h

