




Or2216E

Industrial Rubber Roll Dye Sublimation Printer

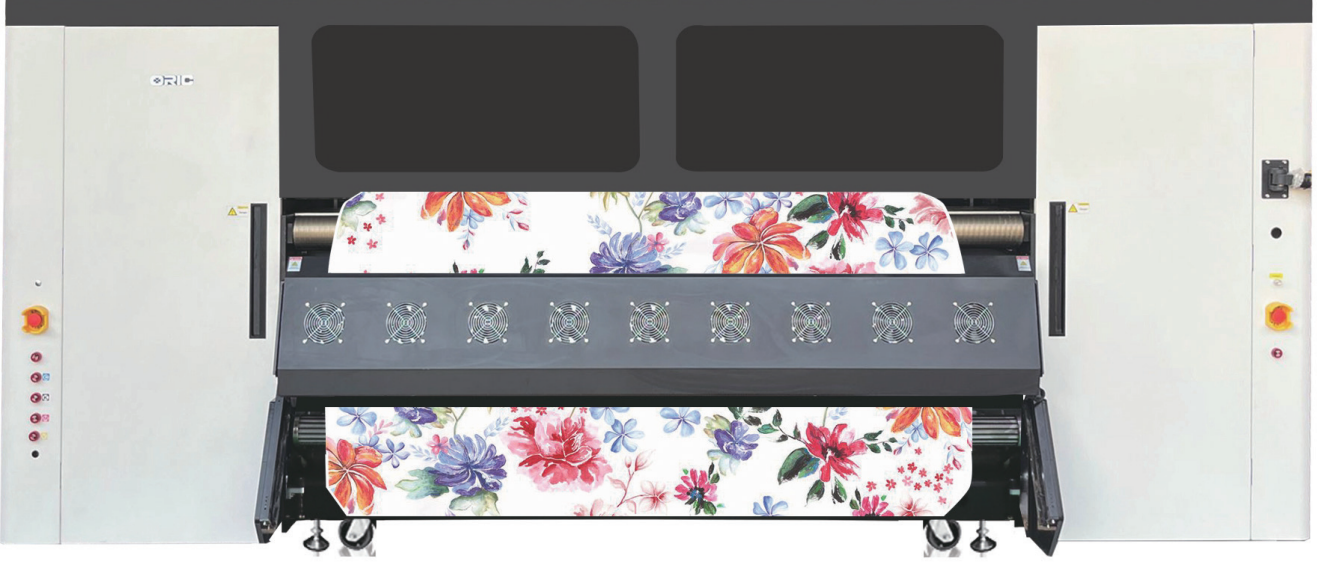

ORIC serisi Dijital baskı makineleri, işletmenizin ihtiyacı olan en yüksek teknolojiyi kullanır. Hem Süblimasyon hemde doğrudan tekstile baskı yapabilen yüksek kaliteli, güvenilir ve hassas yapısı ile işletmenizi rakiplerinden ayıracak kalitede baskıları garanti eder. Yüksek renk performansı ve mükemmel detaylı baskısını, alışılmamış baskı hızı ile birleştirir. Kalitenizi yarına güvenle taşır.

- Daha dayanıklı ve kararlı bir baskı için; Orijinal Epson i3200 yazıcı kafası,
- Daha düzgün kağıt besleme için; keçe silindir.
- Daha yüksek verimlilik ve yüksek performans için; 16 adet kafa yapılandırması,
- Daha doğru baskı sonucunun garantisi ve profesyonel Renk yönetimi için; Orijinal Ergosoft Texprint RIP yazılımı,
- Daha istikrarlı uzun vadeli kullanım ömrü için; Son teknoloji Endüstriyel Makine Tasarım konsepti, Güçlü gövde
- Tamamen kapalı kurutma sistemi ve sessiz fanlar sayesinde gürültüsüz performans
- Daha düşük üretim maliyeti için; Endüstriyel tip, Jumbo Bobin besleme sistemi




www.itsdijital.com

Technical Specifications

Print Head	16 i3200-A1 Print Heads	
Printing Technology	Piezoelectric Inkjet	
Acceptable Media	Width	≤ 2050 mm
	Media Weight	≤30g
	Maximum Media Load	≤ 10000m
Printing Width	≤ 2000 mm	
Ink Cartridges	Type	Super high / high density sublimation ink
	Capacity	5L Ink tank
	Color	4 colors (C/M/Y/K)
Printing Resolution	Maximum 3600 dpi	
Printing Speed	1pass(360x1200dpi): 640 sqm/h 2pass(360x2400dpi): 320 sqm/h	
Media Heating System	Intergrated post heater & Infrared Dryer & Fan system	
Rip	Riprint	
Interface	USB 3.0	
Power Supply	AC 220V ± 10%, 50/60 HZ	
Dimensions(with stand)	Entirety machine size : 4050mm(L) x 2490mm(W) x 1590mm(H) Printer size □4050mm(L) x 1205mm(W) x 1590mm(H) Media loading size □2550mm(L) x 1285mm(W) x 1250mm(H)	
Weight(with stand)	1.8T	
Packing Size	4120mm(L) x 2190mm(W) x 2180mm(H)	
Environment	Power on	Temperature: 59□ to 90□ [15□ to 32□] / Humidity: 35 to 80% (no condensation)
	Power off	Temperature: 41□ to 104□ [5□ to 40□] / Humidity: 20 to 80% (no condensation)
Accessories	USB cable, manual, drain bottle, ink cartridges, RIP software, etc.	



Frequency motor ensures 70% faster speed (compared with the traditional motor), feeding paper more stably




Effectively solve the step deviation and speed variation which caused by different diameter materials during feeding, to ensure the materials are collected neatly




Bottom integrated heater makes the loading & take up easier, improving heating efficiency, more suitable for making samples for customer






The negative pressure ink supply system is used to ensure long-term stable printing and the accuracy of the output .



The chuck drive works efficiently and stably, avoiding accuracy reduction and high maintenance rate caused by worn gear



Junbo media roll maximum 10000m media load optional



* 16pcs i3200-A1 Print Heads Speed

360x1200dpi - 1pass 640 m²/h

360x2400dpi - 2pass 320 m²/h